


TuneMatic

Automatic Motorized Antenna Controller
ELECRAFT E-2 INTERFACE SUPPLEMENT
For ELECRAFT: K3, K3s
Rev. 3/20/17

The Elecraft E-2 interface sends commands to the K3/K3s to key the rig at 10W CW mode while tuning. The switched power is derived from the switched 12V RCA jack on the rig.

- a) Connect RCA plug to DC IN of K3.
- b) Connect DB9 cable to rig RS232 port.
- c) Connect interface output cable to TuneMatic.
- d) Apply power to K3, select MENU button on K3, set the following menu item as indicated:

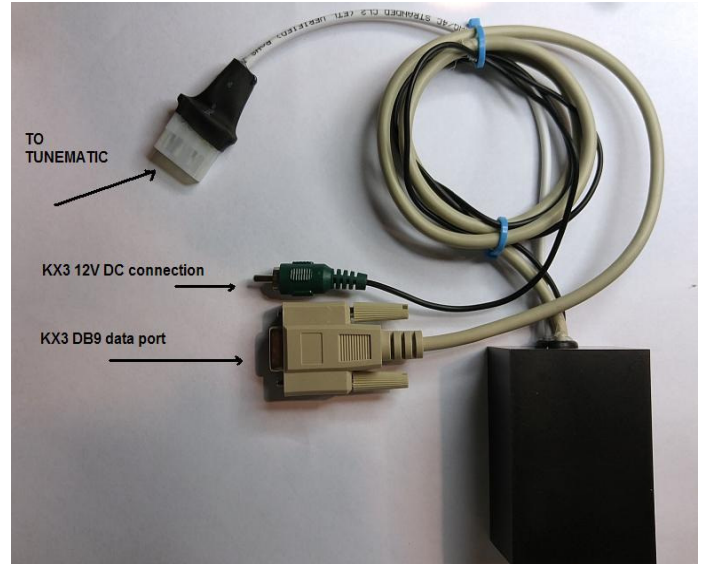

RS232 to 9600b

When K3 power switch is applied, it automatically enables power to the TuneMatic. When TuneMatic operates in TUNE or STORE, it allows the interface to send serial data to key the rig, and sends the unkey command when completed.

JT Communications - Ocala, FL 34470 USA 352-236-0744 www.tunematic.us