

TuneMatic

Automatic Motorized Antenna Controller


KENWOOD KEN-2000 INTERFACE SUPPLEMENT

For KENWOOD: TS-2000(all), TS-450, TS-570, TS-690

Rev. 5/20/16

The Kenwood interface requires user to set rig in AM mode, 10-20W output during TUNE or STORE operation of TuneMatic.

- a) Connect white molex to rig tuner(ATU) port.
- b) Connect large 13 pin DIN plug to rig ACC port.
- c) Connect 4 pin PC power style connector to TuneMatic interface port.
- d) Set rig to AM mode, 10-20W output during TUNE/STORE operations of TuneMatic. Then return rig to desired mode when tuning/storing is completed.

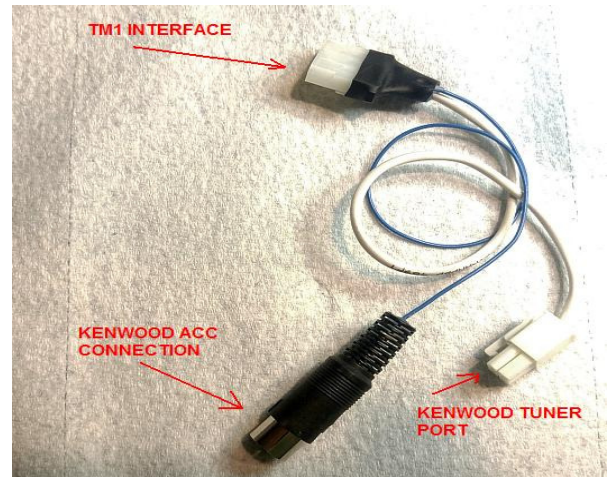

JT Communications- Ocala, FL 34470 USA 352-236-0744
www.tunematic.us